

Highly Accurate On-line Two Color Infrared Focusable Non-contact Pyrometers

CE 600°C to 1800°C

A450C+ is a highly accurate digital two color IR Focusable pyrometer to provide high performance and low maintenance of non contact temperature measurement in demanding industrial and R&D environments. The Pyrometer measures the temperature of an object by calculating the ratio of the energies at two different wavelength bands. The ratio technique eliminates and reduces errors in temperature measurement caused by changes in Emissivity, Surface finish and energy absorbing materials such as Water vapour etc.

The IR pyrometer parameters can be selected via the keypad on the back panel. The settings are displayed on the OLED Display. In the measuring mode, real time temperature is displayed. In Pyrometers with temperature and emissivity is displayed on the rear display screen. A450C+ has focusable optics for optimal match of the instrument for various applications. The pyrometer is equipped with RS-485 output; analog outputs 0/4...20mA. Switching laser ON/OFF does not effect the measurement.




Software "Infrasoft"

AST "Infrasoft" software is under standard scope of supply. It offers possibilities of connecting three pyrometers simultaneously for parameter setting, view real time graph, offline graph and to evaluate measuring data. Communication between the pyrometer and the software is implemented via a cable connected between the pyrometer and the PC serial port. It comes with record feature, spot size calculator and parameter settings features.

Some of the parameters adjustable via software are

- Emissivity, Response Time
- Clear Time (Peak Picker)
- Analog Output
- Sub Range
- Unit of Temperature (°C/°F)
- Communication mode (Comm. mode)

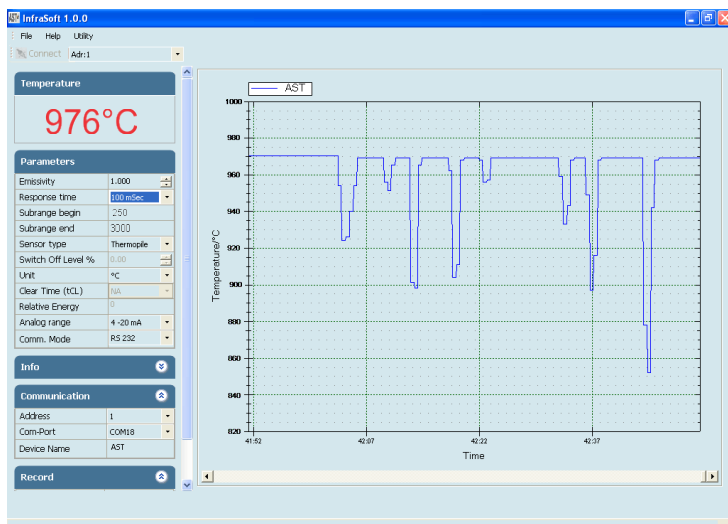

Infrasoft software screen

Features

- Wide temperature ranges from 600°C to 1800°C
- Focusable Optics
- Fast Response Time
- Spectral range 0.7 μm....1.15 μm
- Integrated OLED Display & Parameterizing Keys
- Two Color model (switchable to single colour mode)
- Sighting through lens with laser
- Analog output options 0...20mA/ 4...20mA
- RS-485 Serial interface
- User friendly PC software for communication
- Green LED for pyrometer status indication
- Red LED for Laser ON/OFF indication

Standard Scope of Supply

- Pyrometer with Focusable optics, OLED Display & Parameterizing Keys
- Sighting through lens with laser
- Analog output 4...20mA, 0...20mA
- Digital Interface RS-485
- 5 meter long connection cable with connector
- RS 485 to Ethernet converter with Ethernet Cable
- Calibration certificate, Software & Operation manual

Optional

- Mechanical & Electrical Accessories
- Extra Cable Lengths

Applications

- Induction Heating
- Annealing
- Welding
- Forging
- Sintering
- Melting
- Rolling Mills
- Rolling Kilns
- Crystal growing

Technical Specifications

Model	A450C+
Temperature Range (Analog sub-range adjustable)	600°C - 1800°C
Spectral Range	0.75 - 1.05 µm; 1.0 - 1.1 µm for two colour, for single colour any of the channel can be used
Photodetector Type	Si/Si
Distance to Spot Size Ratio	150:1 (600°C - 1800°C)
Emissivity (ε)	0.1....1.0 adjustable (Single color mode)
Emissivity Slope (ε1 / ε2)	0.85-1.1 in steps of 1/1000
Response Time	10ms or less
Accuracy	±0.5% of reading with + 1°C
Repeatability	0.1% of reading in °C + 1°C
Sighting Options	Through lens along with Laser.
Analog Output	Adjustable to 0 -20mA or 4 - 20mA
Digital Output/ Connectivity	RS 485
Operating Temp. Range	0°C.....70°C
Storage Temp. Range	-20°C...70°C
Adjustable Parameters and Features via Software and Android app	Emissivity, Emissivity Slope, Response Time, Clear Time (Peak Picker), Analog Output, Analog Scale (Sub range), Sensor type (Switches b/w 2-color or single color), Switch off level, Unit Of Temperature(°C/°F), Communication mode (Comm.mode), Record feature, Relay set point & hysteresis, etc.
Adjustable Parameters and Features via Keypad	Emissivity, Emissivity Slope, Response Time, Clear Time (Peak Picker), Analog Output, Analog Scale (Sub range),Sensor type (Switches b/w 2-color or single color), Switch off level, Unit Of Temperature(°C/°F), Communication mode (Comm. mode), Relay set point & hysteresis, address, etc.
Fail alarm	Dirty window and sensor overheating alarms
Power Supply	12V to 28V DC with reverse voltage protection
Power Consumption	Max 4.0 watt
Laser Power	<1 m watt (only PL model)
Protection Class	IP65
Housing	Stainless Steel
Isolation	Power supply,Digital output and Analog output are galvanically isolated against each other
Operating Humidity	10-95%, Non-Condensing Conditions
Display	(1) LCD/LED display in rear cover. The rear cover of the instrument have facility to set/change emmissivity, transmittivity and other settings. (2) Separate display unit supplied with the instruments and have Input 4-20mA and output Retransmission with 2 relay output

Spot Sizes

Focused Working Distances (mm)	Spot Sizes (mm)
	A450C+ 600- 1800°C (150:1)
500	3.30
1000	6.65
2000	13.40
4000	26.70
9000	60.0

Accessories

Mounting Clamp (Pyrometer)
(Reference no: 8500-04)



Air Purge
(Reference no: 8500-05)




Mounting Clamp (Water Cooling Jacket)
(Reference no: 8500-06)



Mounting Flange
(Reference no: 8500-07)



Mounting Plate
(Reference no: 8500-08)




Water Cooling Jacket
(Reference no: 8500-09)



Temperature Indicator
(Reference no: 9000-01)



Adjustable Mounting Stand
(Reference no: 8000-07)




Power supply Input 110/230V AC
Reference No. 9000 - 02
Output 24 V DC, 0.7Amp.




Assembly Options


Pyrometer with Mounting Clamp (8500-04)

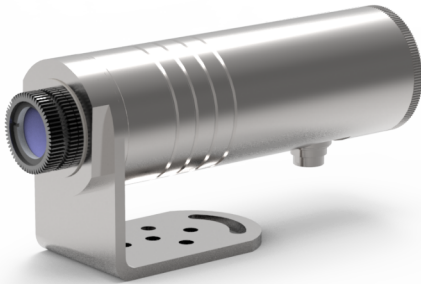


Pyrometer with Mounting Flange (8500-07) + Air Purge (8500-05) + Water Cooling Jacket (8500-09)

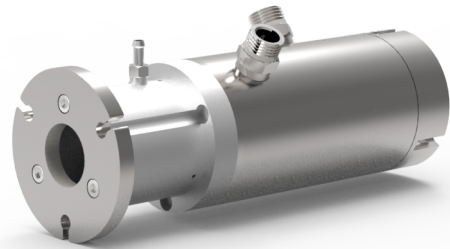


Pyrometer with Air Purge (8500-05) + Mounting Clamp (8500-04)

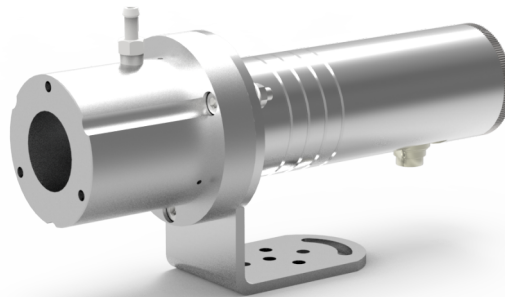

Pyrometer with Mounting Flange (8500-07) + Air Purge (8500-05)

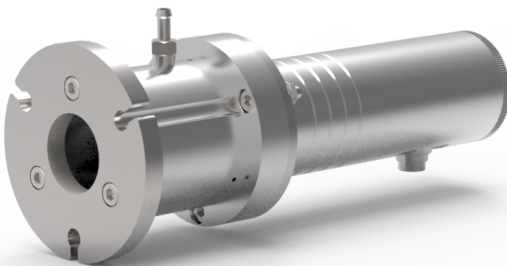

Pyrometer with Mounting Clamp (8500-06) + Air Purge (8500-05) + Water Cooling Jacket (8500-09)

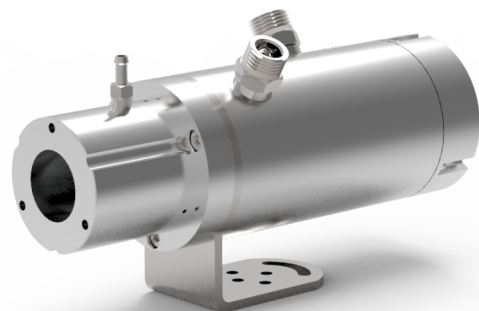

Tempsens Instruments (I) Pvt. Ltd.

B-188 A Road No.-5, M.I.A., Madri, Udaipur - 313 003 (Raj) INDIA

Ph.: +91-294-3507700, Fax.: +91-294-3507731,

E-mail: info@tempsens.com

www.tempsens.com