

250°C to 600°C

The P-GM+ (Portable Glass Mould Pyrometer) is a hand held, battery powered Non-Contact pyrometer designed primarily for the measurement of mould temperatures in container glass industry. It gives an instantaneous reading of the temperature and data logging with the press of a single switch.

Readings taken are stored into memory and logged with Serial number and date/time for reviewing it. Stored temperature readings are held in memory until deleted, they are not lost when the unit is turned off or the battery is removed. It provides a powerful data logging capability with storage for up to 1000 measurements.

P-GM+ comprises of hand held pyrometer. The pyrometer has an infrared detector with associated electronics and a rigid fibre optic probe, the tip of which is momentarily touched to the hot surface to take measurement.

The processor has an easy to read OLED display, operating button, and a data store. 3AAA size rechargeable cell powers the whole system.

Features


- **New** : Readings can now be logged with a time and date identifier - allowing a wider variety of analyses to be performed on the temperature data.
- **Battery Indication** : Low battery, charging and fully charged battery.
- **Adjustable Temperature Range With Blinking Indication**
 - Range from 250°C - 600°C
 - Standard temperature: Display will be Normal
 - Maximum temperature: Display will Blink
- **Fast, easy, single button measurement** : Touch the probe tip to the target surface and press the capture button. The temperature is taken and displayed (and stored). Single button for power ON and data capturing.
- **Adjustable Probe Rotation** : 360° rotation in 18 Steps
- **Accurate** : Spectral response is 1.6 μm . Short wavelength operation minimizes errors due to emissivity and/or optics contamination.
- **Portable and convenient** : Thermometer is robust and lightweight. Probe is interchangeable on site.
- **Powerful data logging** : Up to 1000 readings can be stored.
- **Comprising** : temperature, time, date and emissivity. The stored data can be downloaded via a USB 2.0 to Computer.
- **In-built charging** : Charging via USB 2.0 Charger
- **Auto OFF** : Automatic power off feature with adjustable time. (Default 1 min.) when placed in Ideal state.



Technical Specifications

Model	P-GM+
Temperature Range	250°C....600°C
Spectral Wavelength	1.6 μm
Response Time	2 msec. Adjustable upto 10 sec.
Repeatability	0.1% of reading in °C ±1°C
Accuracy	+/- 0.3% of the measured value ±1°C
Emissivity	0.1....1.0 adjustable from PC via USB
Digital Output	USB 2.0
Logging	1000 reading downloaded to PC via USB 2.0
Power Requirement	3 AAA rechargeable Cell
Ambient Temp. Limits	Max. 250°C at fiber optic probe
Operating Temp. Range	0...70°C at handle end
Dimension	475.50 x 48.50 x 48.50 mm
Adjustable parameter through software	Emissivity, response time, temperature unit, clear time (peak picker) via USB.

Drawing

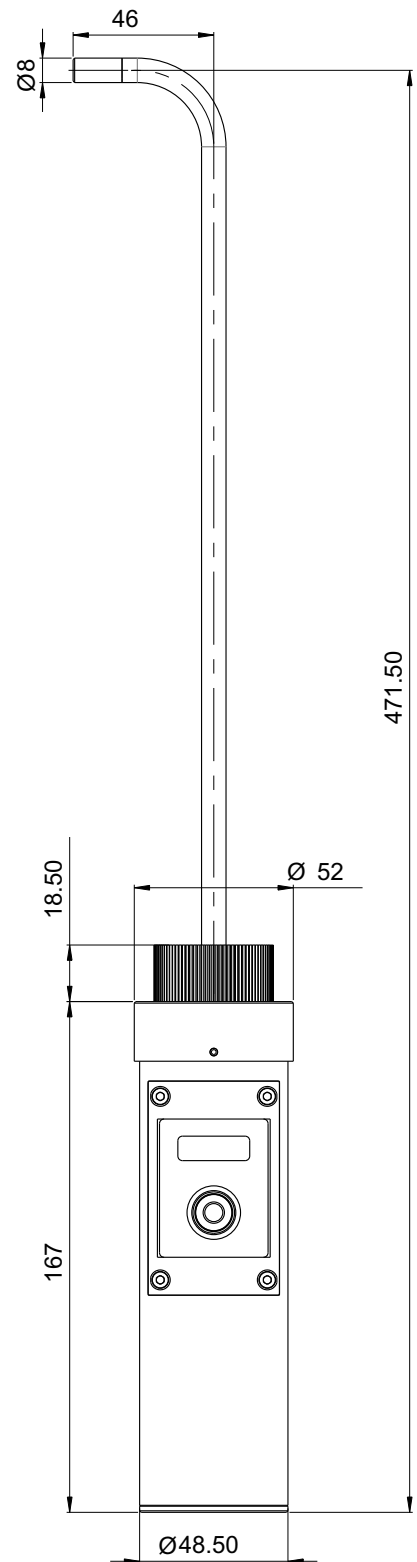

Standard Scope of Supply

- P-GM+ Pyrometer
- 3AAA Rechargeable Cell
- Battery Charger
- USB Data Cable
- Carry Case
- PC Software



Tempsens Instruments (I) Pvt. Ltd. U# I
 B-188A, Road No.5, M.I.A.,
 Udaipur-313003 (Rajsthan) INDIA
 Ph.:+91-294-3057700 to 800
 Fax.:+91-294-3057750
 Email: info@tempsens.com

